

Ind. a - Revision : 09-2008



## 2RREu45 250x56R

## P/N E15-A5

Substitute for B12-A4



Voltage	Frequency	Input power	Current	Capacitor	Airflow	Speed rotation	Noise level	Rotation direction	Operating temperature
V	Hz	Wa	A	µF	m³/h	RPM	dBA	↻	Min / Max
115	50	182	1,59	25,0	1 490	2 720	73	R	-40°C / +60°C
115	60	245	2,14	25,0	1 715	3 095	77	R	-40°C / +70°C
115	50				877 CFM				-40°F / +140°F
115	60				1009 CFM				-40°F / +158°F

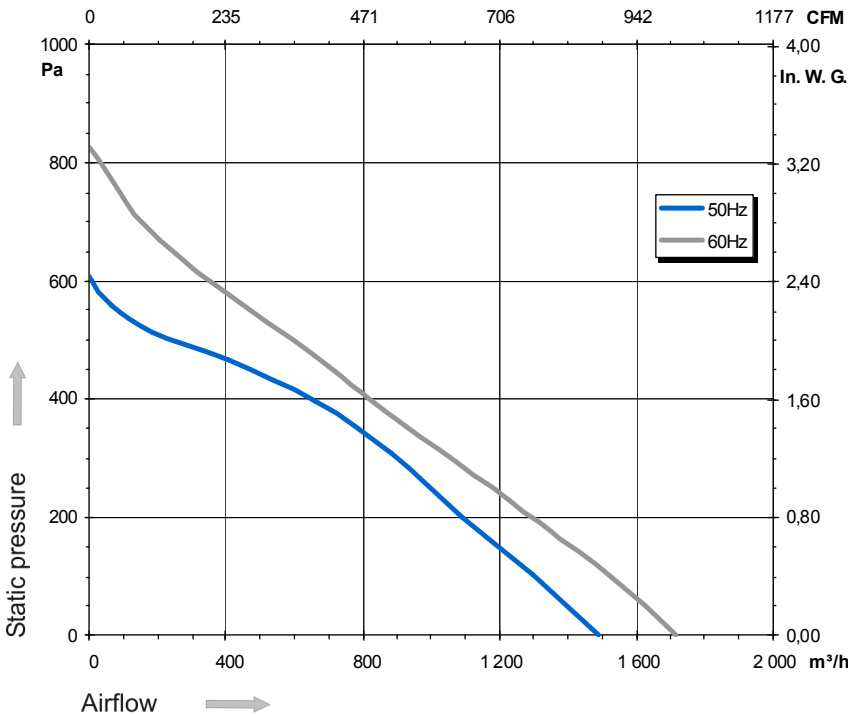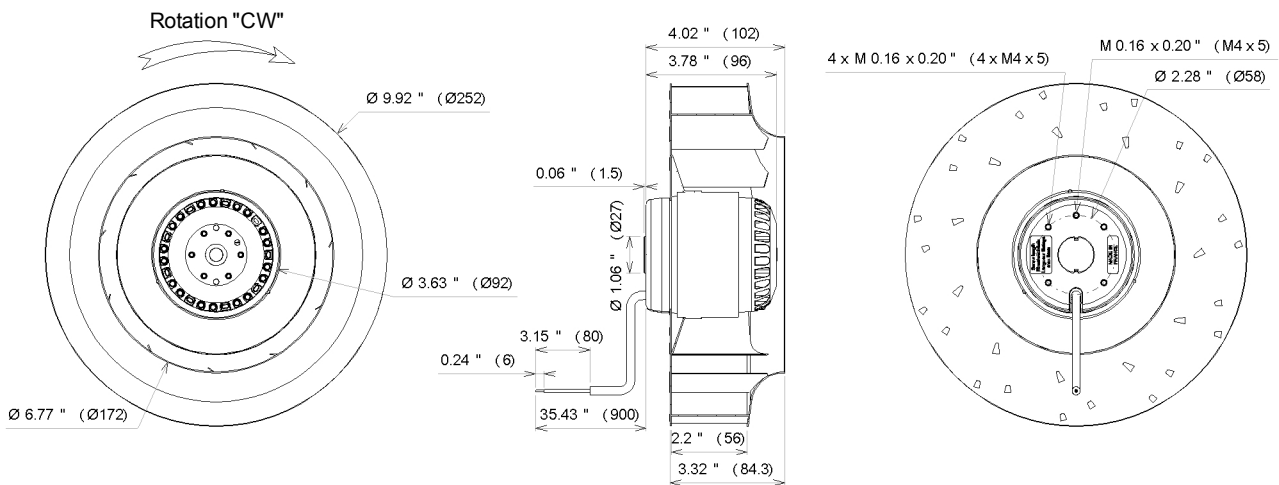


- Weight : 3,4 Kg

- Ball bearing
- Class F, thermally protected
- IP44 protection
- G2.5 balancing
- Rotor : black paint
- Galvanized steel impeller
- UL approved motor

UL2111 (XEW2,8)  
N° File E135223  
2RS945



Capacitor for 50Hz	Capacitor for 60Hz	Inlet cone
19257	19257	16114

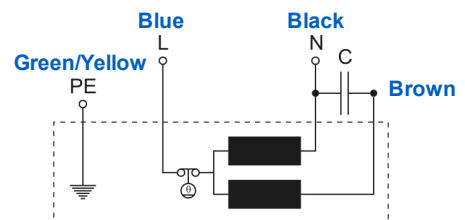

Non contractual document. All specifications are subject to change without prior notice. Picture for information only.