
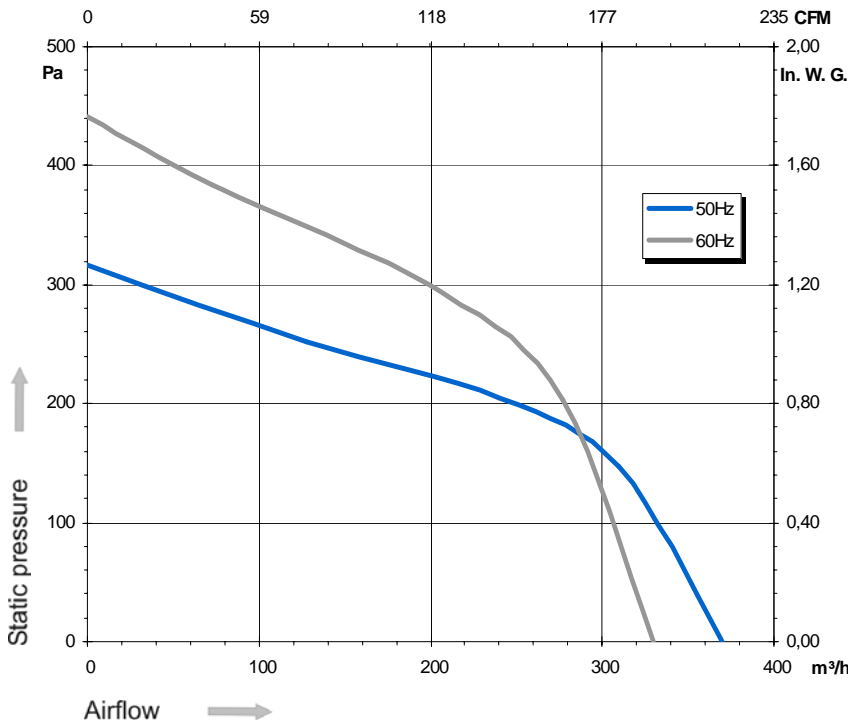


Ind. b - Revision : 11-2009

2GDSu15 120x126L P/N C50-B0

Voltage	Frequency	Input power	Current	Capacitor	Airflow	Speed rotation	Noise level	Rotation direction	Operating temperature
V	Hz	Wa	A	µF	m³/h	RPM	dBA	↻	Min / Max
115	50	112	0,98	8,0	370	1 390	57	L	-40°C / +70°C
115	60	116	1,02	8,0	330	1 280	54	L	-40°C / +70°C
115	50				217 CFM				-40°F / +158°F
115	60				194 CFM				-40°F / +158°F

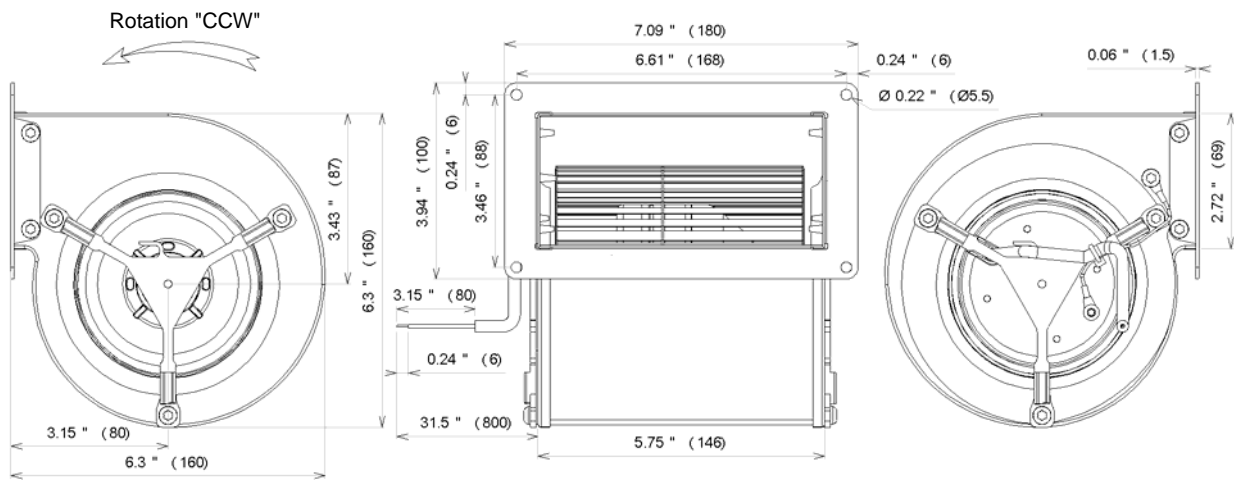


- Weight : 2,3 Kg

- Ball bearing
- Class F, thermally protected
- IP44 protection
- G2.5 balancing
- Scroll housing : black paint
- Galvanized steel impeller
- UL approved motor

UL2111 (XEWR2,8)
N° File E135223
2SS915



Capacitor for 50Hz	Capacitor for 60Hz	Finger guard
19222	19222	21237

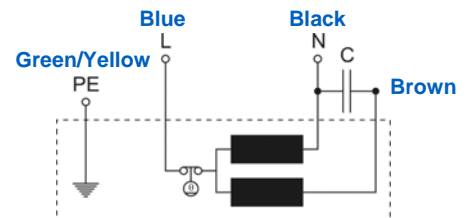

Non contractual document. All specifications are subject to change without prior notice. Picture for information only.