


Ind. b - Revision : 09-2011



4GDSu25 133x190LR

P/N I32-A0

Substitute for C50-B1

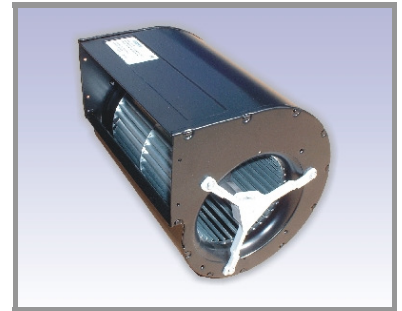

Voltage	Frequency	Input power	Current	Capacitor	Air flow	Speed rotation	Noise level	Rotation direction	Operating temperature
V	Hz	W a	A	µF	m³/h	RPM	dBA	↻	Min / Max
115	50	52	0,46	8,0	510	1 040	54	L	-40°C / +70°C
115	60	65	0,58	8,0	530	1 070	55	L	-40°C / +70°C
115	50				300 CFM				-40°F / +158°F
115	60				311 CFM				-40°F / +158°F

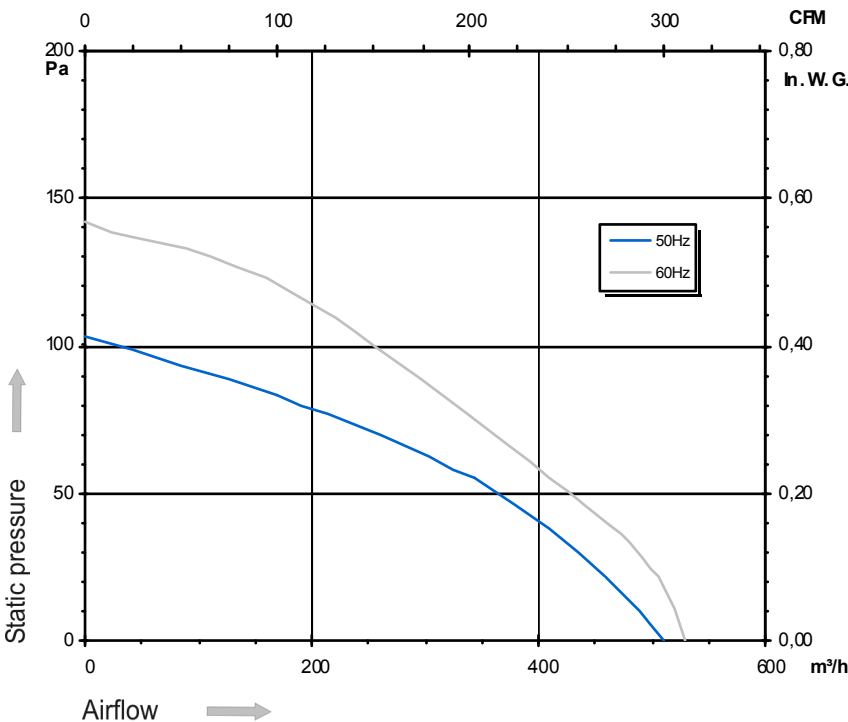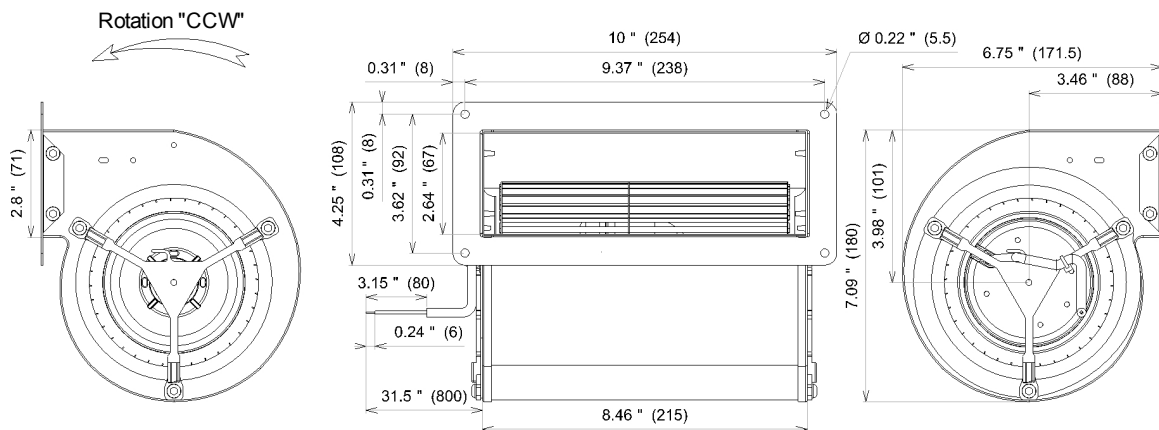


- Weight : 3,5 Kg

- Ball bearing
- Class F, thermally protected
- IP44 protection
- G2.5 balancing
- Scroll housing : black paint
- Galvanized steel impeller
- UL approved motor

UL2111 (XEWR2,8)
N° File E135223
4SS925



Capacitor for 50Hz	Capacitor for 60Hz	Finger guard
19222	19222	21236

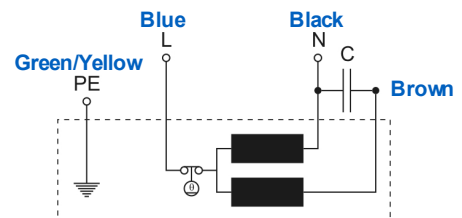

Non contractual document. All specifications are subject to change without prior notice. Picture for information only.