



Ind. a - Revision : 05-2007

## 2GREu45 160x62R P/N C48-B1

Voltage	Frequency	Input power	Current	Capacitor	Airflow	Speed rotation	Noise level	Rotation direction	Operating temperature
V	Hz	Wa	A	µF	m³/h	RPM	dBA	↻	Min / Max
115	50	233	2,03	25,0	590	2 060	67	R	-40°C / +70°C
115	60	273	2,38	25,0	545	2 000	66	R	-40°C / +70°C
115	50				347 CFM				-40°F / +158°F
115	60				320 CFM				-40°F / +158°F

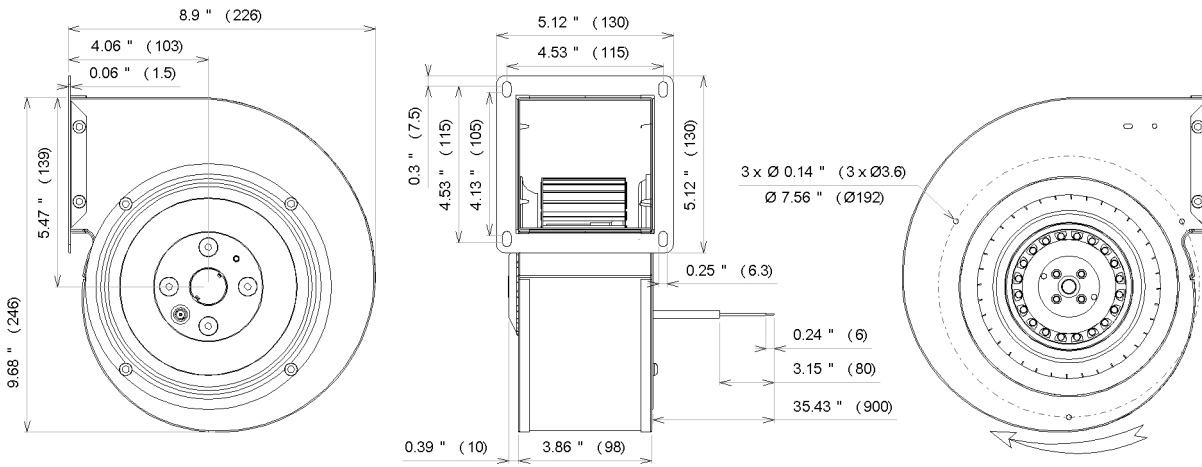


Rotation "CW"

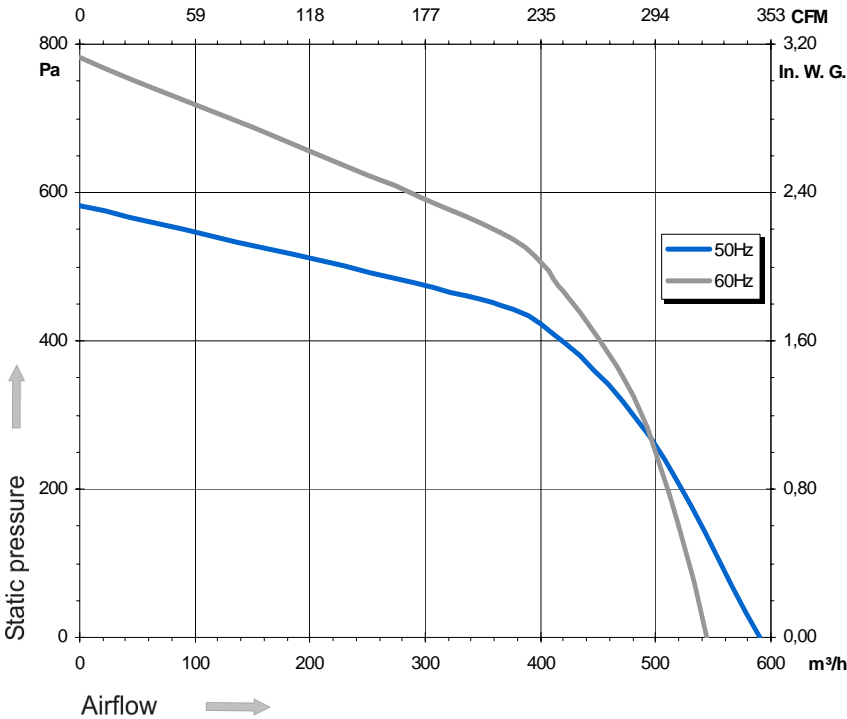

- Weight : 4,1 Kg
- Ball bearing
- Class F, thermally protected
- IP44 protection
- G2.5 balancing
- Galvanized steel impeller
- Rotor : black paint
- Scroll housing : black paint
- UL approved motor



Capacitor for 50Hz	Capacitor for 60Hz	Finguer guard	Inlet cone
19257	19257	21291	16154

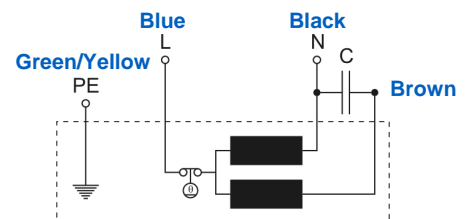

Non contractual document. All specifications are subject to change without prior notice. Picture for information only.