




- compact and space saving design
- 100% speed controllable through auto transformers
- Motor protection through thermal contacts as standard



Type	U [Volt]	f [Hz]	Curve	P _i [kW]	I _N [A]	n [min ⁻¹]	t _R [°F]	t _R [°C]	C [μF]	ΔI [%]	I _A /I _N	▲	★	■ [kg]
DRAD 224-4 B	3~460Y	60	A	0.92	1.45	1515	104	40	-	-	2.6	54	01.005	14
DRAD 224-4 B	3~230D	60	B	0.83	2.45	1380	104	40	-	-	2.6	54	01.006	14
DRAD 224-4 B	3~400Y	50	C	0.87	1.50	1210	104	40	-	-	2.5	54	01.005	14

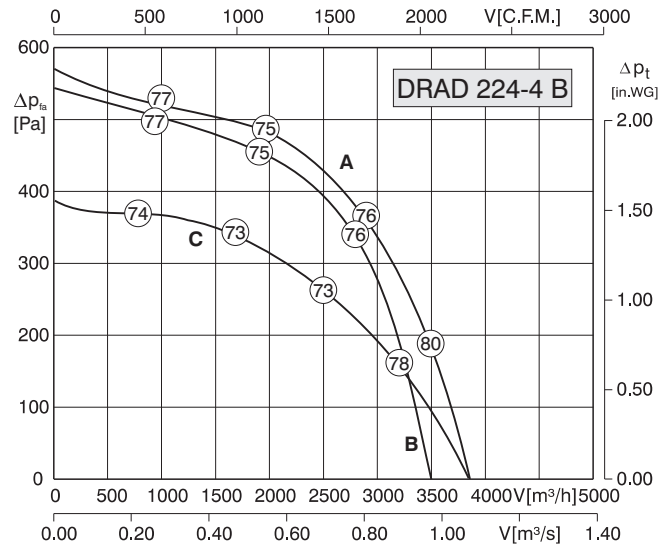