




- compact and space saving design
- 100% speed controllable through auto transformers
- Motor protection through thermal contacts as standard



Type	U [Volt]	f [Hz]	Curve	P <sub>i</sub> [kW]	I <sub>N</sub> [A]	n [min <sup>-1</sup> ]	t <sub>r</sub> [°F]	t <sub>r</sub> [°C]	C [μF]	ΔI [%]	I <sub>A</sub> /I <sub>N</sub>	▲	★	█ [kg]
DRAD 250-4 IP54	3~460Y	60	A	1.50	2.60	1550	122	50	-	-	2.9	54	01.005	29
DRAD 250-4 IP54	3~230D	60	B	1.40	2.40	1480	122	50	-	-	2.9	54	01.006	29
DRAD 250-4 IP54	3~400Y	50	C	1.60	2.95	1200	140	60	-	-	2.5	54	01.005	29

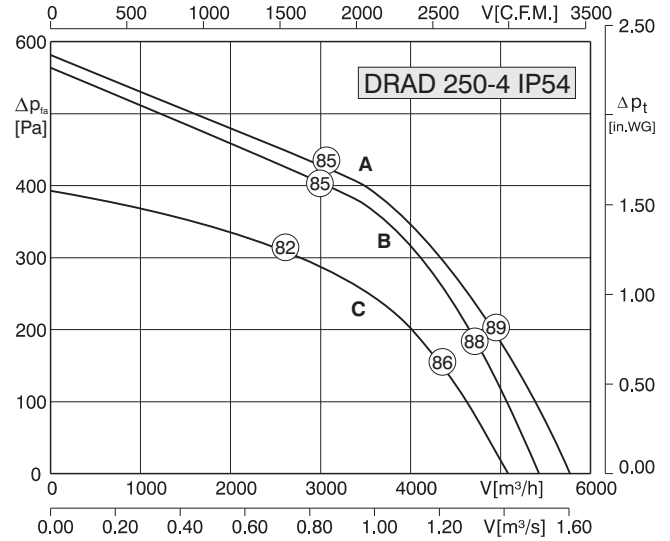