




- Steep pressure-volume-performance curve
- compact and space saving design
- 100% speed controllable through auto transformers
- Motor protection through thermal contacts as standard



Type	U [Volt]	f [Hz]	Curve	P _i [kW]	I _N [A]	n [min ⁻¹]	t _r [°F]	t _r [°C]	C [μF]	ΔI [%]	I _A /I _N	▲	✳	Ⓜ [kg]
DRAD 251-4	3~460Y	60	A	1.10	1.70	1350	120	50	-	-	2.9	54	01.005	20
DRAD 251-4	3~230Δ	60	B	0.95	2.80	1260	120	50	-	-	2.9	54	01.006	20
DRAD 251-4	3~400Y	50	C	0.85	1.55	1150	149	65	-	-	2.4	54	01.005	20

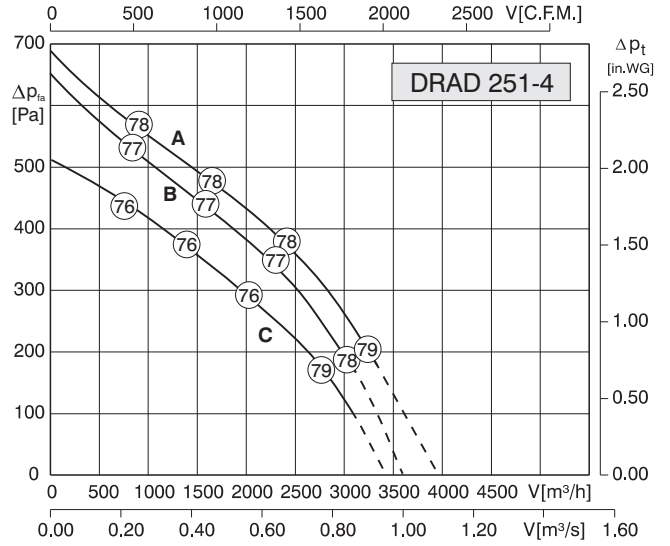