




- Steep pressure-volume-performance curve
- compact and space saving design
- 100% speed controllable through auto transformers
- Motor protection through thermal contacts as standard



Type	U [Volt]	f [Hz]	Curve	P _i [kW]	I _N [A]	n [min ⁻¹]	t _r [°F]	t _r [°C]	C [μF]	ΔI [%]	I _A /I _N	▲	★	Ⓜ [kg]
DRAD 279-4 IP54	3~460Y	60	A	2.20	3.60	1400	104	40	-	-	2.9	54	01.005	27
DRAD 279-4 IP54	3~230Δ	60	B	2.00	6.20	1300	104	40	-	-	2.9	54	01.006	27
DRAD 279-4 IP54	3~400D	50	C	1.80	3.40	1170	120	50	-	-	2.7	54	01.005	27

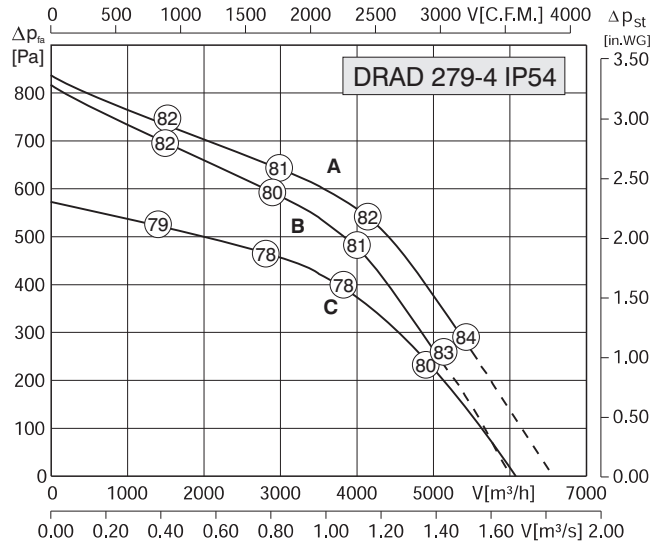