




- Steep pressure-volume-performance curve
- compact and space saving design
- 100% speed controllable through auto transformers
- Motor protection through thermal contacts as standard



Type	U [Volt]	f [Hz]	Curve	P _i [kW]	I _N [A]	n [min ⁻¹]	t _r [°F]	t _r [°C]	C [μF]	ΔI [%]	I _A /I _N	▲	★	█ [kg]
DRAD 281-4 IP10	3~460Y	60	A	2.50	3.90	1340	120	50	-	-	2.5	10	01.005	32
DRAD 281-4 IP10	3~230Δ	60	B	2.20	6.40	1250	120	50	-	-	2.5	10	01.006	32
DRAD 281-4 IP10	3~400D	50	C	1.90	3.60	1140	130	55	-	-	3.4	10	01.005	32

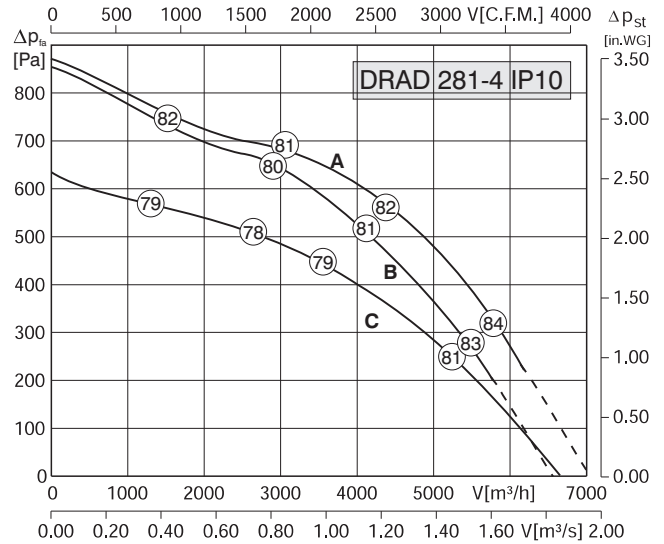