




- Steep pressure-volume-performance curve
- compact and space saving design
- 100% speed controllable through auto transformers
- Motor protection through thermal contacts as standard



Type	U [Volt]	f [Hz]	Curve	P _i [kW]	I _N [A]	n [min ⁻¹]	t _r [°F]	t _r [°C]	C [μF]	ΔI [%]	I _A /I _N	⚠	✳	⚖ [kg]
DRAD 314-4	3~460Y	60	A	4.10	5.60	1470	120	50	-	7	3.2	54	01.005	47
DRAD 314-4	3~230Δ	60	B	3.70	10.0	1390	120	50	-	5	3.2	54	01.006	47
DRAD 314-4	3~400Y	50	C	3.00	4.9	1160	104	40	-	2	2.6	54	01.006	47

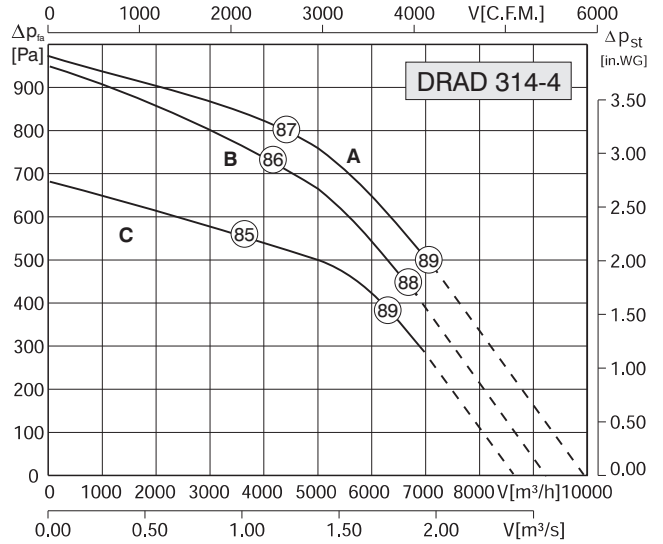