




- compact and space saving design
- 100% speed controllable through auto transformers
- Motor protection through thermal contacts as standard



Type	U [Volt]	f [Hz]	Curve	P _i [kW]	I _N [A]	n [min ⁻¹]	t _r [°F]	t _r [°C]	C [μF]	ΔI [%]	I _A /I _N	▲	★	█ [kg]
DRAD 315-4	3~460Y	60	A	6.20	9.70	1630	122	50	-	10	4.5	54	01.005	60
DRAD 315-4	3~230D	60	B	5.80	17.0	1570	122	50	-	8	4.5	54	01.006	60
DRAD 315-4	3~400Y	50	C	4.50	8.70	1370	140	60	-	-	4.3	54	01.005	60

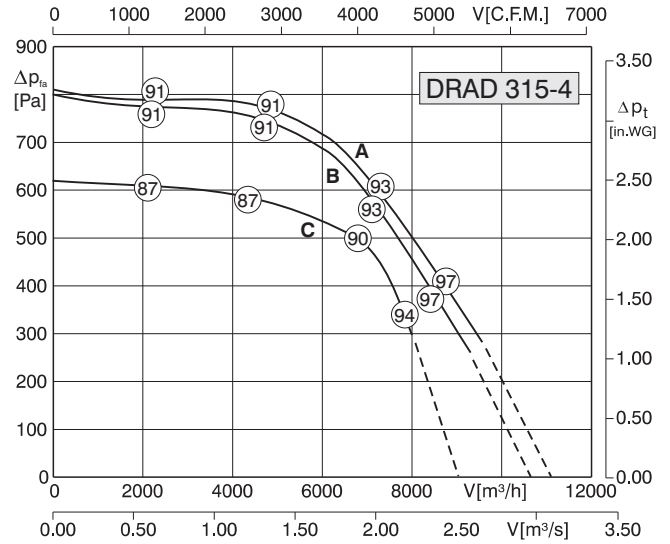