




- compact and space saving design
- 100% speed controllable through auto transformers
- Motor protection through thermal contacts as standard



Type	U [Volt]	f [Hz]	Curve	P _i [kW]	I _N [A]	n [min ⁻¹]	t _R [°F]	t _R [°C]	C [μF]	ΔI [%]	I _A /I _N	▲	★	■ [kg]
DRAD 315-6	3~460Y	60	A	2.50	3.90	880	122	50	-	-	2.2	54	01.005	36.5
DRAD 315-6	3~230D	60	B	2.20	6.80	815	122	50	-	-	2.2	54	01.006	36.5
DRAD 315-6	3~400Y	50	C	2.10	3.70	780	140	60	-	-	2.6	54	01.005	36.5

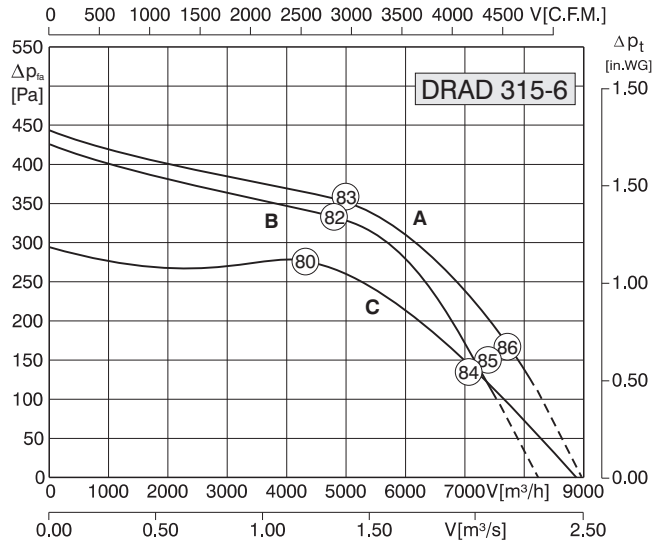