




- compact and space saving design
- 100% speed controllable through auto transformers
- Motor protection through thermal contacts as standard



Type	U [Volt]	f [Hz]	Curve	P _i [kW]	I _N [A]	n [min ⁻¹]	t _r [°F]	t _r [°C]	C [μF]	ΔI [%]	I _A /I _N	▲	★	█ [kg]
DRAD 355-4	3~460Y	60	A	7.65	11.7	1655	104	40	-	24	4.7	54	01.005	79
DRAD 355-4	3~230D	60	B	7.30	21.3	1610	104	40	-	18	4.5	54	01.006	79
DRAD 355-4	3~400Y	50	C	6.65	11.8	1365	104	40	-	11	3.7	54	01.005	79

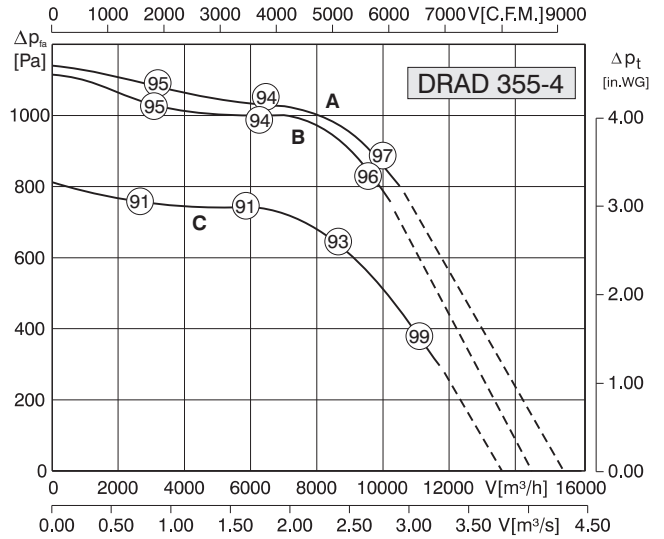