




- compact and space saving design
- 100% speed controllable through auto transformers
- Motor protection through thermal contacts as standard



Type	U [Volt]	f [Hz]	Curve	P <sub>i</sub> [kW]	I <sub>N</sub> [A]	n [min <sup>-1</sup> ]	t <sub>R</sub> [°F]	t <sub>R</sub> [°C]	C [μF]	ΔI [%]	I <sub>A</sub> /I <sub>N</sub>	▲	★	■ [kg]
DRAD 355-6	3~460Y	60	A	3.10	4.70	990	104	40	-	2	3.0	54	01.005	50.5
DRAD 355-6	3~230D	60	B	2.80	8.30	910	104	40	-	-	3.0	54	01.006	50.5
DRAD 355-6	3~400Y	50	C	2.95	5.20	790	104	40	-	-	3.0	54	01.006	50.5

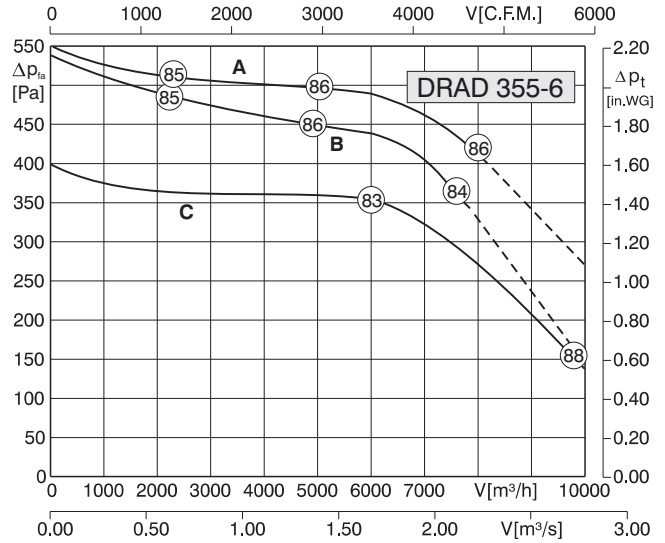