




- Steep pressure-volume-performance curve
- compact and space saving design
- 100% speed controllable through auto transformers
- Motor protection through thermal contacts as standard



Type	U [Volt]	f [Hz]	Curve	P _i [kW]	I _N [A]	n [min ⁻¹]	t _R [°F]	t _R [°C]	C [μF]	ΔI [%]	I _A /I _N	▲	★	⊞ [kg]
DRAD 356-4 IP10	3~460Y	60	A	5.80	8.10	1410	120	50	-	2	2.4	10	01.005	71
DRAD 356-4 IP10	3~230Δ	60	B	5.10	14.0	1330	120	50	-	2	2.4	10	01.006	71
DRAD 356-4 IP10	3~400Y	50	C	5.30	8.40	1140	120	50	-	-	2.6	10	01.006	71

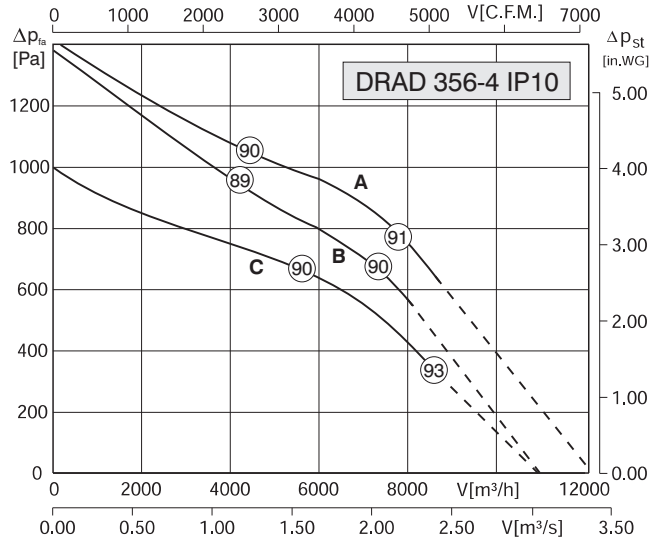