




- compact and space saving design
- 100% speed controllable through auto transformers
- Motor protection through thermal contacts as standard



Type	U [Volt]	f [Hz]	Curve	P _i [kW]	I _N [A]	n [min ⁻¹]	t _r [°F]	t _r [°C]	C [μF]	ΔI [%]	I _A /I _N	▲	★	█ [kg]
DRAE 180-4 B	1~120	60	A	0.46	4.00	1420	122	50	24	-	1.8	54	01.025	9.5
DRAE 180-4 B	1~230	60	A	0.46	2.00	1420	122	50	6	-	1.8	54	01.025	9.5
DRAE 180-4 B	1~230	50	B	0.42	1.90	1250	122	50	6	21	2.0	54	01.025	9.5

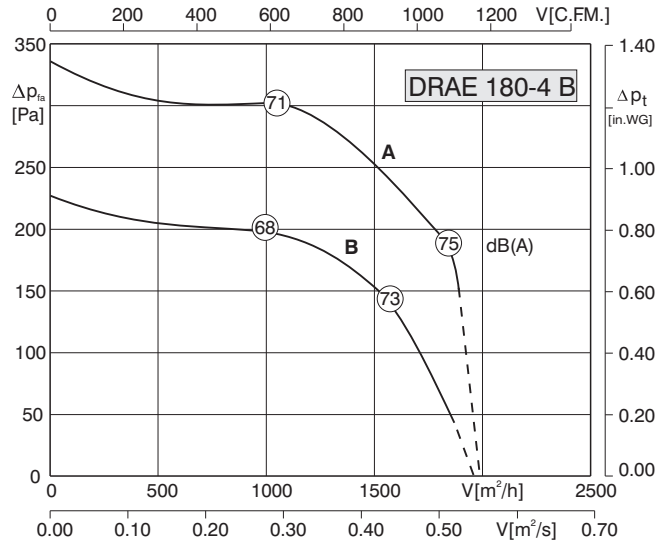