




- Steep pressure-volume-performance curve
- compact and space saving design
- 100% speed controllable through auto transformers
- Motor protection through thermal contacts as standard



Type	U [Volt]	f [Hz]	Curve	P _i [kW]	I _N [A]	n [min ⁻¹]	t _r [°F]	t _r [°C]	C [μF]	ΔI [%]	I _A /I _N	▲	★	█ [kg]
DRAE 181-4	1~120	60	A	0.23	2.10	960	158	70	16	-	1.1	54	01.025	10
DRAE 181-4	1~230	60	A	0.23	1.05	960	158	70	4	-	1.1	54	01.025	10
DRAE 181-4	1~230	50	B	0.20	0.90	1060	158	70	4	-	1.5	54	01.025	10

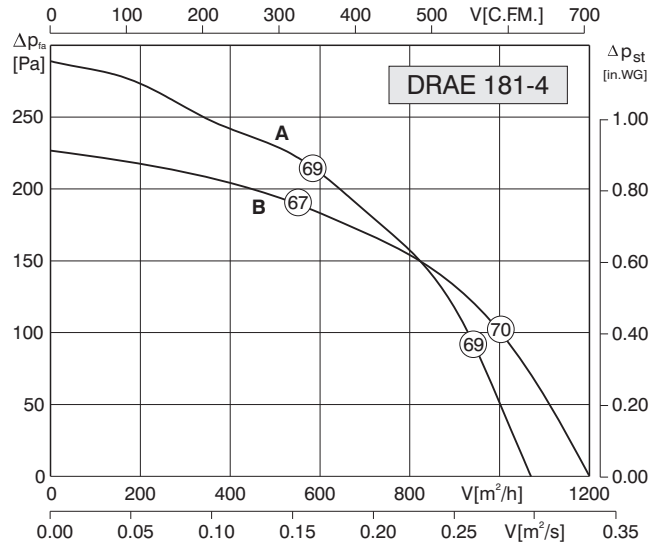