




- Steep pressure-volume-performance curve
- compact and space saving design
- 100% speed controllable through auto transformers
- Motor protection through thermal contacts as standard



Type	U [Volt]	f [Hz]	Curve	P <sub>i</sub> [kW]	I <sub>N</sub> [A]	n [min <sup>-1</sup> ]	t <sub>R</sub> [°F]	t <sub>R</sub> [°C]	C [μF]	ΔI [%]	I <sub>A</sub> /I <sub>N</sub>	⚠	✳	Ⓜ [kg]
DRAE 195-4	1~120	60	A	0.32	2.80	880	140	60	20	-	1.1	54	01.025	11.5
DRAE 195-4	1~230	60	A	0.32	1.40	880	140	60	5	-	1.1	54	01.025	11.5
DRAE 195-4	1~230	50	B	0.28	1.20	950	158	70	5	-	1.4	54	01.025	11.5

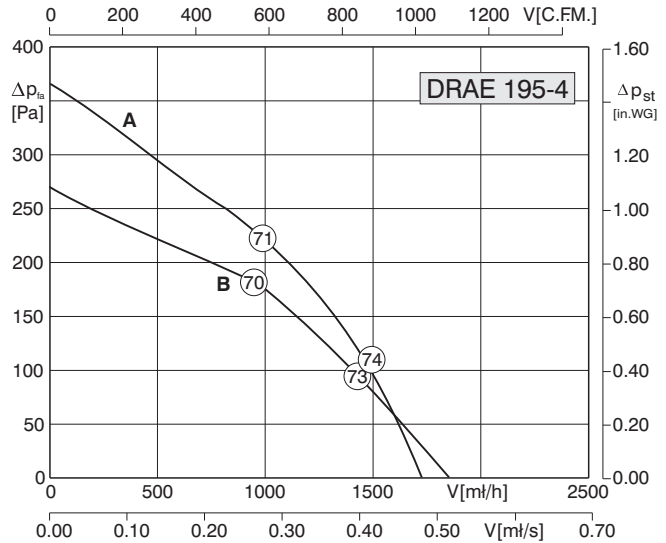