




- Steep pressure-volume-performance curve
- compact and space saving design
- 100% speed controllable through auto transformers
- Motor protection through thermal contacts as standard



Type	U [Volt]	f [Hz]	Curve	P _i [kW]	I _N [A]	n [min ⁻¹]	t _r [°F]	t _r [°C]	C [μF]	ΔI [%]	I _A /I _N	▲	★	█
DRAE 195-4L	1~120	60	A	0.51	4.80	1130	122	50	30	-	1.2	54	01.025	13
DRAE 195-4L	1~230	60	A	0.51	2.40	1130	122	50	8	-	1.2	54	01.025	13
DRAE 195-4L	1~230	50	B	0.40	1.80	1150	158	70	8	-	1.7	54	01.025	13

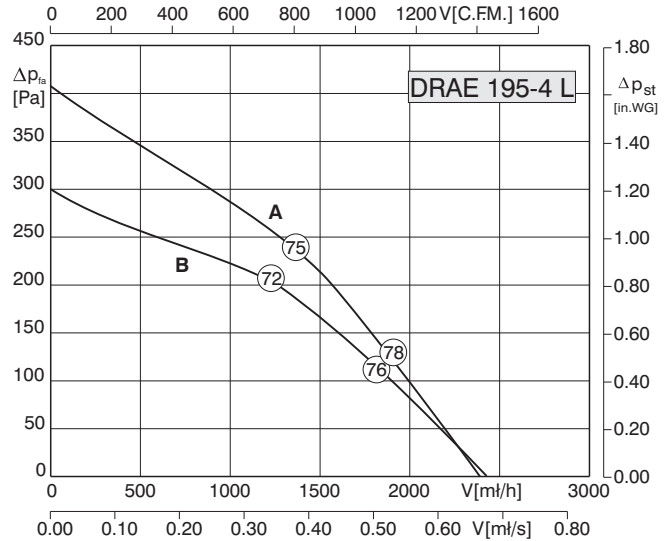