




- compact and space saving design
- 100% speed controllable through auto transformers
- Motor protection through thermal contacts as standard



Type	U [Volt]	f [Hz]	Curve	P _i [kW]	I _N [A]	n [min ⁻¹]	t _R [°F]	t _R [°C]	C [μF]	ΔI [%]	I _A /I _N	▲	★	█ [kg]
DRAE 200-4 B	1~120	60	A	0.62	5.40	1350	122	50	40	-	1.5	54	01.025	13
DRAE 200-4 B	1~230	60	A	0.62	2.70	1350	122	50	10	-	1.5	54	01.025	13
DRAE 200-4 B	1~230	50	B	0.52	2.30	1250	122	50	10	2.0	1.8	54	01.025	13

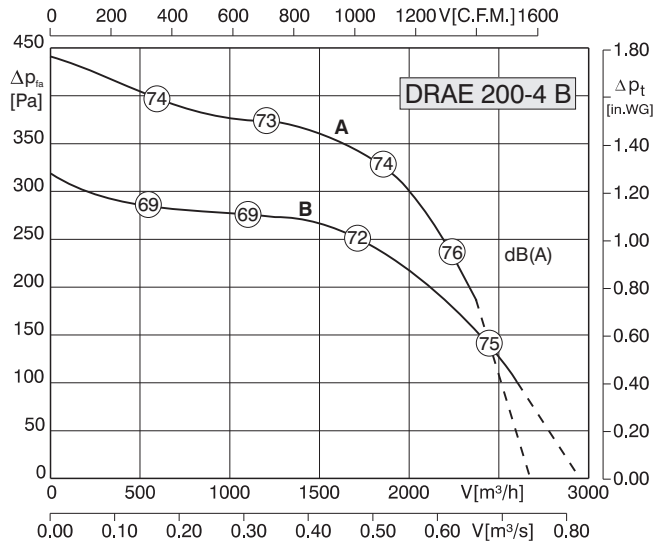