




- compact and space saving design
- 100% speed controllable through auto transformers
- Motor protection through thermal contacts as standard



Type	U [Volt]	f [Hz]	Curve	P <sub>i</sub> [kW]	I <sub>N</sub> [A]	n [min <sup>-1</sup> ]	t <sub>r</sub> [°F]	t <sub>r</sub> [°C]	C [μF]	ΔI [%]	I <sub>A</sub> /I <sub>N</sub>	▲	★	█ [kg]
DRAE 224-4 B (5LA)	1~115	60	A	1.30	11	1240	104	40	50	-	1.6	54	01.025	16
DRAE 224-4 B (5LA)	1~230	60	A	1.30	5.50	1240	104	40	14	-	1.6	54	01.025	16
DRAE 224-4 B (5LA)	1~230	50	B	1.10	4.70	1140	140	60	14	20	1.8	54	01.025	16

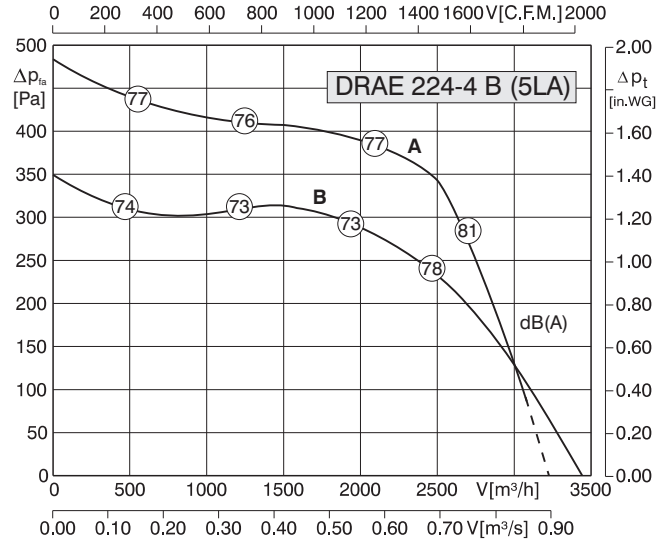