




- compact and space saving design
- 100% speed controllable through auto transformers
- Motor protection through thermal contacts as standard



Type	U [Volt]	f [Hz]	Curve	P <sub>i</sub> [kW]	I <sub>N</sub> [A]	n [min <sup>-1</sup> ]	t <sub>R</sub> [°F]	t <sub>R</sub> [°C]	C [μF]	ΔI [%]	I <sub>A</sub> /I <sub>N</sub>	⚠	⊛	Ⓜ [kg]
DRAE 224 B (IP10)-4	1~120	60	A	0.68	5.80	1200	122	50	40	-	1.5	54	01.025	13.5
DRAE 224 B (IP10)-4	1~230	60	A	0.68	2.90	1200	122	50	10	-	1.5	54	01.025	13.5
DRAE 224 B (IP10)-4	1~230	50	B	0.57	2.50	1250	122	50	10	2	1.8	54	01.025	13.5

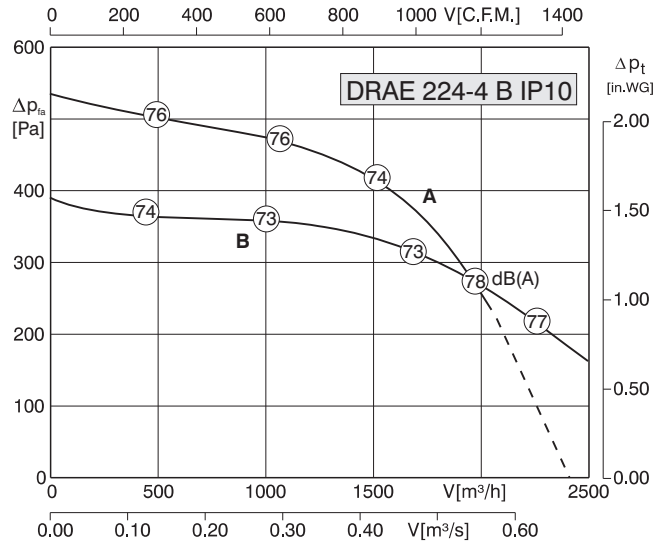