




- Steep pressure-volume-performance curve
- compact and space saving design
- 100% speed controllable through auto transformers
- Motor protection through thermal contacts as standard



Type	U [Volt]	f [Hz]	Curve	P_i [kW]	I_N [A]	n [min ⁻¹]	t_R [°F]	t_R [°C]	C [μF]	ΔI [%]	I_A/I_N	▲	★	█ [kg]
DRAE 240-4	1~120	60	A	0.64	5.50	1175	122	50	30	-	1.4	54	01.025	15
DRAE 240-4	1~230	60	A	0.64	2.75	1175	122	50	8	-	1.4	54	01.025	15
DRAE 240-4	1~230	50	B	0.59	2.60	1045	122	50	8	-	1.6	54	01.025	15

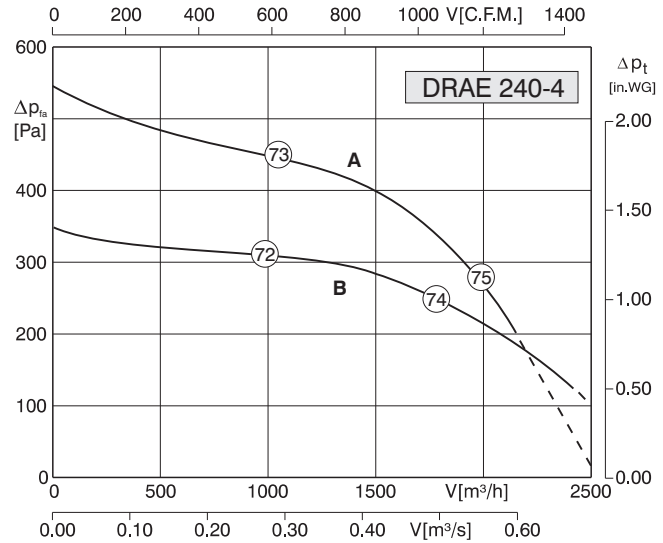