




- Steep pressure-volume-performance curve
- compact and space saving design
- 100% speed controllable through auto transformers
- Motor protection through thermal contacts as standard



Type	U [Volt]	f [Hz]	Curve	P _i [kW]	I _N [A]	n [min ⁻¹]	t _r [°F]	t _r [°C]	C [μF]	ΔI [%]	I _A /I _N	▲	★	█ [kg]
DRAE 240-4L	1~120	60	A	1.15	10.0	1320	122	50	50	-	1.6	54	01.025	21
DRAE 240-4L	1~230	60	A	1.15	5.00	1320	122	50	14	-	1.6	54	01.025	21
DRAE 240-4L	1~230	50	B	1.05	4.75	1120	122	50	14	5.0	1.8	54	01.025	21

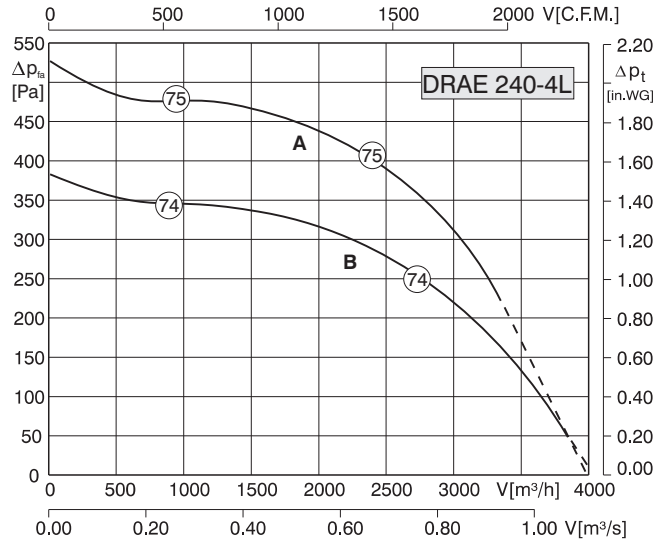