




- Steep pressure-volume-performance curve
- compact and space saving design
- 100% speed controllable through auto transformers
- Motor protection through thermal contacts as standard



Type	U [Volt]	f [Hz]	Curve	P _i [kW]	I _N [A]	n [min ⁻¹]	t _R [°F]	t _R [°C]	C [μF]	ΔI [%]	I _A /I _N	▲	★	■ [kg]
DRAE 251-4	1~120	60	A	1.15	10.0	1270	140	60	60	-	1.4	54	01.025	21
DRAE 251-4	1~230	60	A	1.15	5.00	1270	140	60	14	-	1.4	54	01.025	21
DRAE 251-4	1~230	50	B	0.96	4.30	1170	140	60	14	5	1.8	54	01.025	21

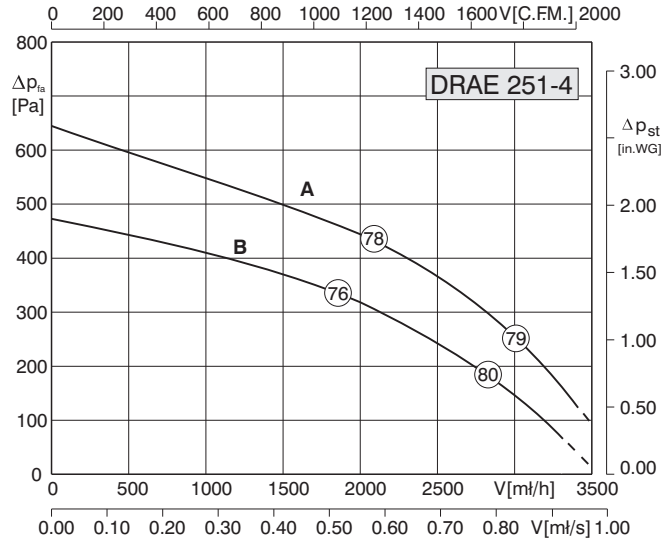