




- Steep pressure-volume-performance curve
- compact and space saving design
- 100% speed controllable through auto transformers
- Motor protection through thermal contacts as standard



Type	U [Volt]	f [Hz]	Curve	P <sub>i</sub> [kW]	I <sub>N</sub> [A]	n [min <sup>-1</sup> ]	t <sub>r</sub> [°F]	t <sub>r</sub> [°C]	C [μF]	ΔI [%]	I <sub>A</sub> /I <sub>N</sub>	⚠	✳	⚖ [kg]
DRAE 251-4L	1~120	60	A	1.50	13.0	1430	122	50	80	17	1.9	54	01.025	26
DRAE 251-4L	1~230	60	A	1.50	6.50	1430	122	50	20	17	1.9	54	01.025	26
DRAE 251-4L	1~230	50	B	1.35	6.00	1240	131	55	20	5	1.5	54	01.025	26

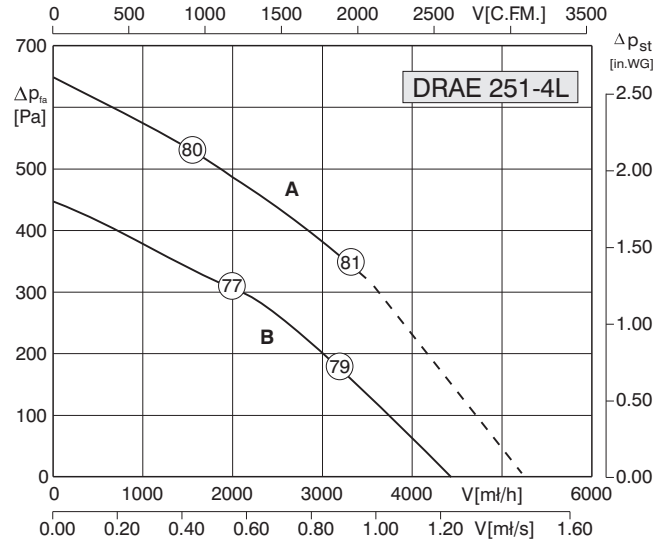