




- Steep pressure-volume-performance curve
- compact and space saving design
- 100% speed controllable through auto transformers
- Motor protection through thermal contacts as standard



Type	U [Volt]	f [Hz]	Curve	P <sub>i</sub> [kW]	I <sub>N</sub> [A]	n [min <sup>-1</sup> ]	t <sub>r</sub> [°F]	t <sub>r</sub> [°C]	C [μF]	ΔI [%]	I <sub>A</sub> /I <sub>N</sub>	⚠	✳	⚖ [kg]
DRAE 279-4 IP10	1~120	60	A	1.70	14.8	1235	120	50	100	-	1.5	10	01.025	27
DRAE 279-4 IP10	1~230	60	B	1.70	7.40	1235	120	50	25	-	1.5	10	01.025	27
DRAE 279-4 IP10	1~230	50	C	1.65	7.30	1050	120	50	25	-	1.5	10	01.025	27

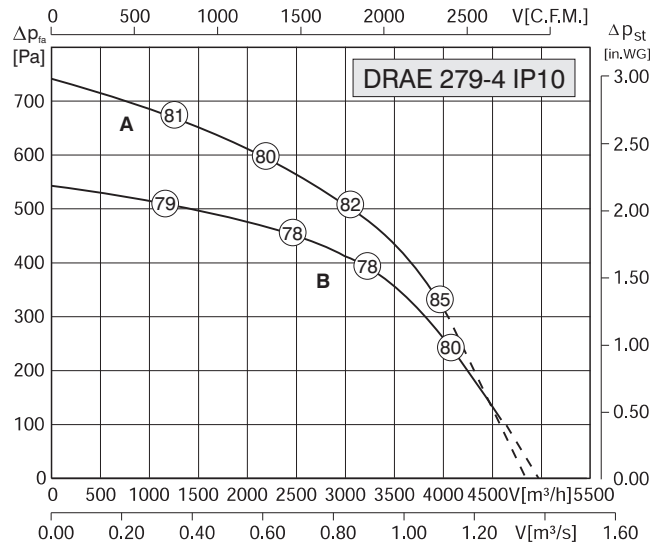