




- compact and space saving design
- 100% speed controllable through auto transformers
- Motor protection through thermal contacts as standard



Type	U [Volt]	f [Hz]	Curve	P ₁ [kW]	I _N [A]	n [min ⁻¹]	t _r [°F]	t _r [°C]	C [μF]	ΔI [%]	I _A /I _N	▲	★	█ [kg]
ERAD 250-4	3~460Y	60	A	1.15	1.90	1400	122	50	-	-	2.6	54	01.005	18
ERAD 250-4	3~230D	60	B	1.00	3.10	1325	140	60	-	-	2.6	54	01.006	18
ERAD 250-4	3~400Y	50	C	0.75	1.60	1230	149	65	-	-	3.6	54	01.005	18

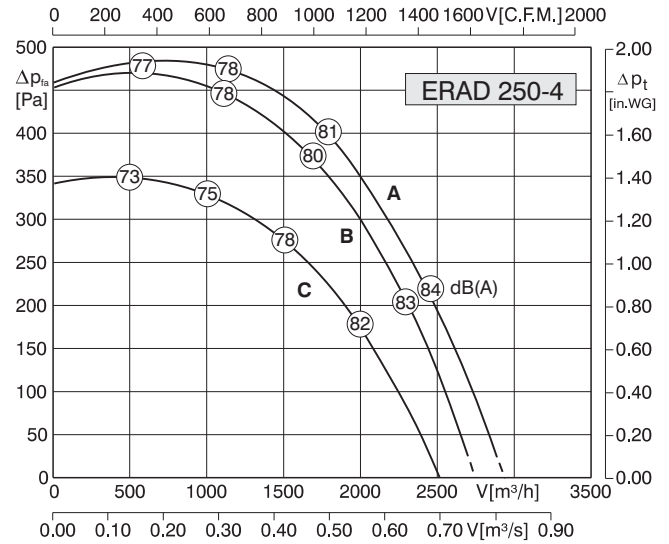