




- compact and space saving design
- 100% speed controllable through auto transformers
- Motor protection through thermal contacts as standard



Type	U [Volt]	f [Hz]	Curve	P ₁ [kW]	I _N [A]	n [min ⁻¹]	t _r [°F]	t _r [°C]	C [μF]	ΔI [%]	I _A /I _N	▲	★	█ [kg]
ERAD 250-6	3~460Y	60	A	0.40	0.75	990	122	50	-	-	1.9	54	01.005	15
ERAD 250-6	3~230D	60	B	0.35	1.20	930	140	60	-	-	1.9	54	01.006	15
ERAD 250-6	3~400Y	50	C	0.33	0.70	820	122	50	-	-	2.1	54	01.005	15

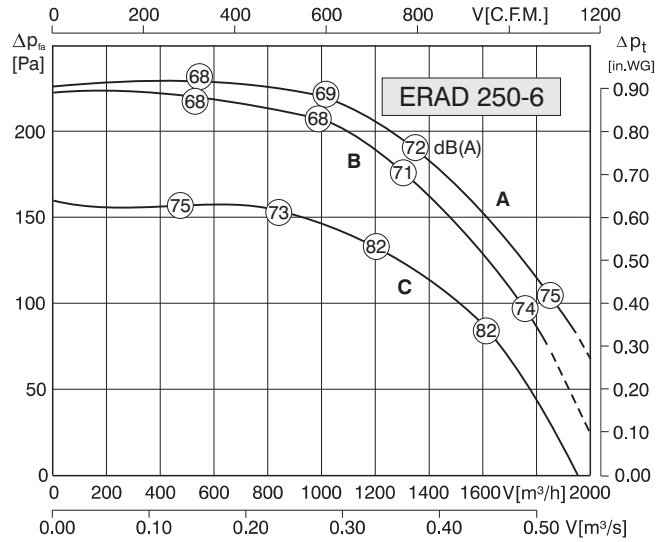