




- compact and space saving design
- 100% speed controllable through auto transformers
- Motor protection through thermal contacts as standard



Type	U [Volt]	f [Hz]	Curve	P ₁ [kW]	I _N [A]	n [min ⁻¹]	t _r [°F]	t _r [°C]	C [μF]	ΔI [%]	I _A /I _N	▲	★	█ [kg]
ERAD 280-6	3~460Y	60	A	0.60	1.05	1050	122	50	-	-	3.0	54	01.005	20
ERAD 280-6	3~230D	60	B	0.54	1.70	1020	122	50	-	-	3.0	54	01.006	20
ERAD 280-6	3~400Y	50	C	0.54	1.10	860	104	40	-	-	2.9	54	01.005	20

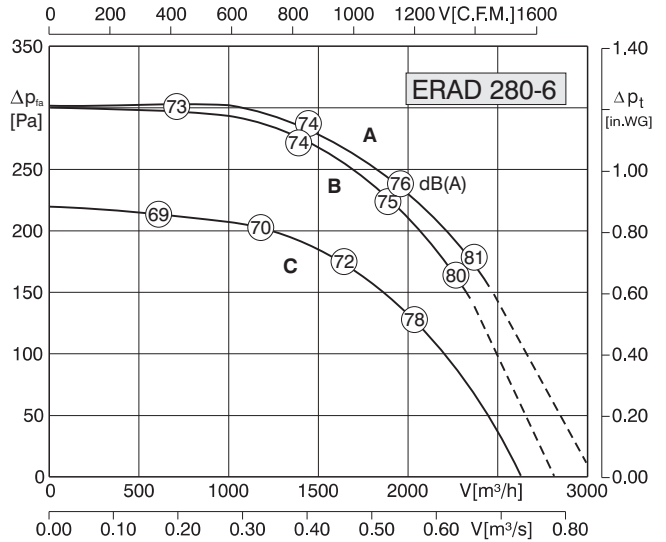