




- compact and space saving design
- 100% speed controllable through auto transformers
- Motor protection through thermal contacts as standard



Type	U [Volt]	f [Hz]	Curve	P _i [kW]	I _N [A]	n [min ⁻¹]	t _R [°F]	t _R [°C]	C [μF]	ΔI [%]	I _A /I _N	▲	★	■ [kg]
ERAD 315-4	3~460Y	60	A	2.90	4.90	1635	122	50	-	9	4.8	54	01.005	36
ERAD 315-4	3~230D	60	B	2.75	8.30	1590	122	50	-	9	4.8	54	01.006	36
ERAD 315-4	3~400Y	50	C	2.05	4.40	1380	158	70	-	5	4.2	54	01.005	36

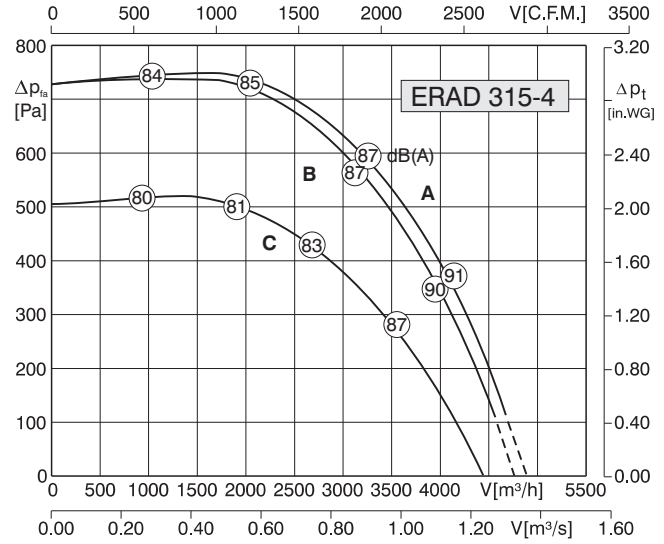