




- compact and space saving design
- 100% speed controllable through auto transformers
- Motor protection through thermal contacts as standard



Type	U [Volt]	f [Hz]	Curve	P ₁ [kW]	I _N [A]	n [min ⁻¹]	t _r [°F]	t _r [°C]	C [μF]	ΔI [%]	I _A /I _N	▲	★	█ [kg]
ERAD 315-6	3~460Y	60	A	1.20	2.1	1025	122	50	-	-	2.7	54	01.005	27
ERAD 315-6	3~230D	60	B	1.10	3.5	980	122	50	-	-	2.7	54	01.006	27
ERAD 315-6	3~400Y	50	C	0.95	2.1	850	122	50	-	-	2.5	54	01.005	27

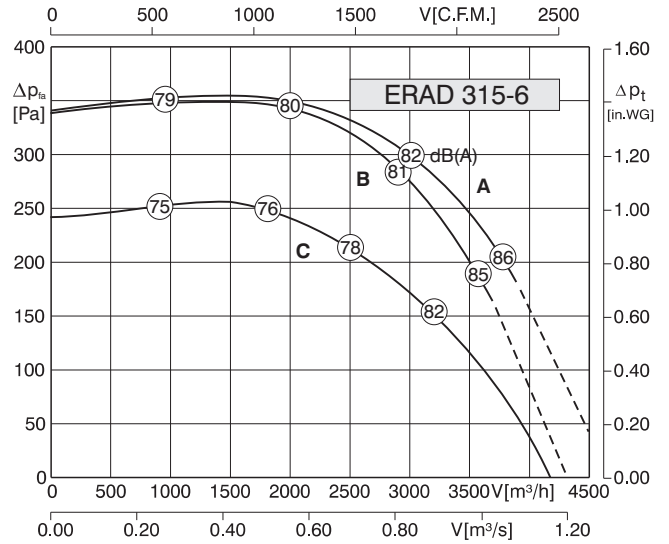