




- compact and space saving design
- 100% speed controllable through auto transformers
- Motor protection through thermal contacts as standard



Type	U [Volt]	f [Hz]	Curve	P <sub>i</sub> [kW]	I <sub>N</sub> [A]	n [min <sup>-1</sup> ]	t <sub>R</sub> [°F]	t <sub>R</sub> [°C]	C [μF]	ΔI [%]	I <sub>A</sub> /I <sub>N</sub>	▲	✱	■ [kg]
ERAD 400-6	3~460Y	60	A	3.50	5.45	1040	104	40	-	-	3.1	54	01.005	64
ERAD 400-6	3~230D	60	B	3.20	9.70	970	104	40	-	-	3.1	54	01.006	64
ERAD 400-6	3~400Y	50	C	3.00	5.50	860	104	40	-	-	3.1	54	01.005	64

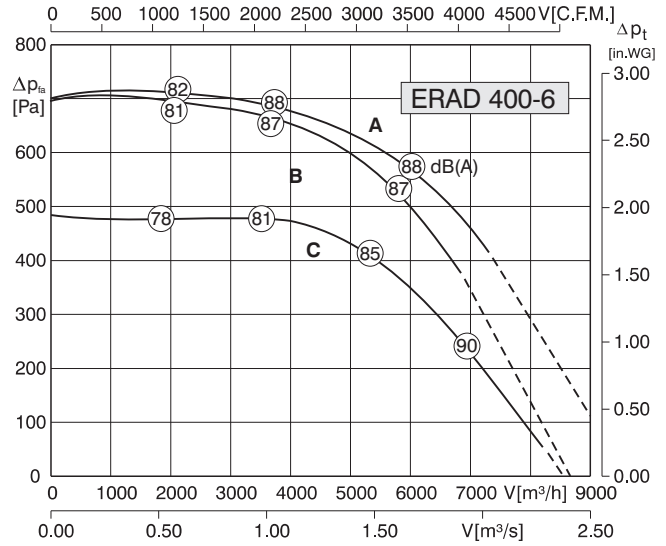