




- compact and space saving design
- 100% speed controllable through auto transformers
- Motor protection through thermal contacts as standard



Type	U [Volt]	f [Hz]	Curve	P _i [kW]	I _N [A]	n [min ⁻¹]	t _r [°F]	t _r [°C]	C [μF]	ΔI [%]	I _A /I _N	▲	★	█ [kg]
ERAE 180-4 B	1~120	60	A	0.29	2.50	1480	122	50	16	15	1.7	54	01.024	7.0
ERAE 180-4 B	1~230	60	A	0.29	1.25	1480	122	50	4	15	1.7	54	01.024	7.0
ERAE 180-4 B	1~230	50	B	0.20	0.93	1365	158	70	4	17	2.5	54	01.024	7.0

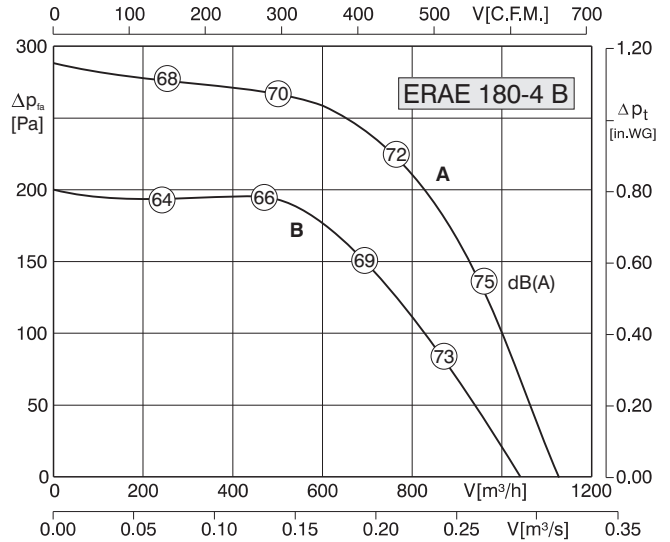