




- compact and space saving design
- 100% speed controllable through auto transformers
- Motor protection through thermal contacts as standard



Type	U [Volt]	f [Hz]	Curve	P _i [kW]	I _N [A]	n [min ⁻¹]	t _R [°F]	t _R [°C]	C [μF]	ΔI [%]	I _A /I _N	▲	★	■ [kg]
ERAE 200-4 B	1~120	60	A	0.40	3.50	1340	122	50	24	2.0	1.3	54	01.024	8
ERAE 200-4 B	1~230	60	A	0.40	1.75	1340	122	50	10	2.0	1.3	54	01.024	8
ERAE 200-4 B	1~230	50	B	0.35	1.60	1180	122	50	10	2.0	1.6	54	01.024	8

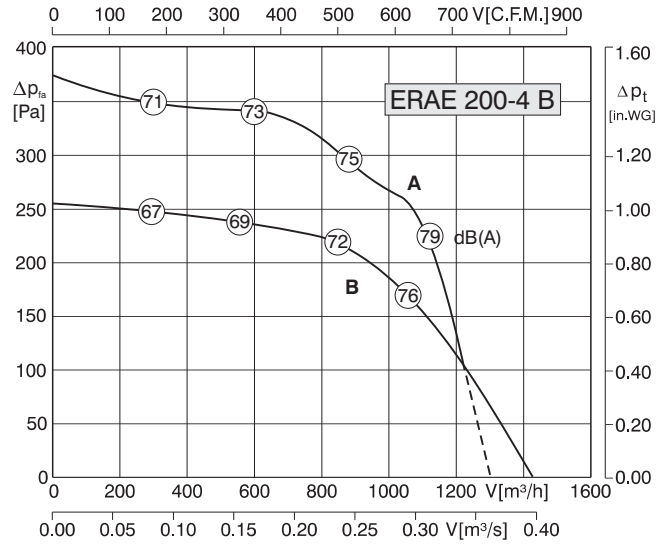