




- compact and space saving design
- 100% speed controllable through auto transformers
- Motor protection through thermal contacts as standard



Type	U [Volt]	f [Hz]	Curve	P ₁ [kW]	I _N [A]	n [min ⁻¹]	t _r [°F]	t _r [°C]	C [μF]	ΔI [%]	I _A /I _N	▲	★	Ⓜ [kg]
ERAE 225-4	1~120	60	A	0.55	5.20	1570	122	50	30	8	1.8	54	01.024	12
ERAE 225-4	1~230	60	A	0.55	2.60	1570	122	50	8	8	1.8	54	01.024	12
ERAE 225-4	1~230	50	B	0.47	2.40	1350	140	60	8	17	2.6	54	01.024	12

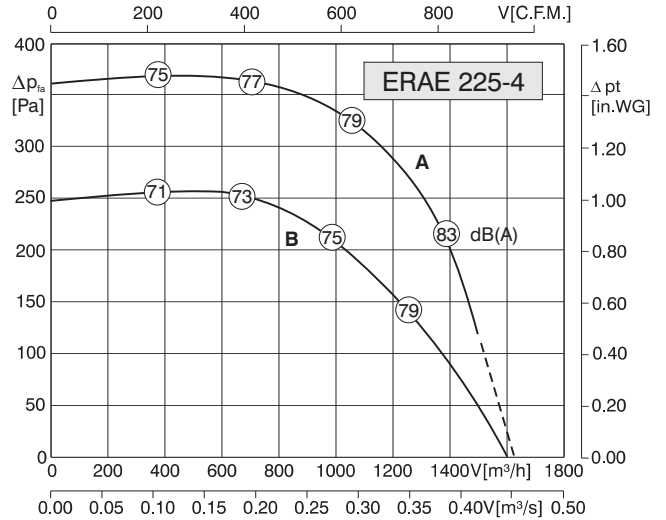