




- compact and space saving design
- 100% speed controllable through auto transformers
- Motor protection through thermal contacts as standard



Type	U [Volt]	f [Hz]	Curve	P _i [kW]	I _N [A]	n [min ⁻¹]	t _R [°F]	t _R [°C]	C [μF]	ΔI [%]	I _A /I _N	▲	★	■ [kg]
ERAE 250-4	1~120	60	A	0.99	8.60	1320	122	50	64	-	1.5	54	01.024	17.5
ERAE 250-4	1~230	60	A	0.99	4.30	1320	122	50	16	-	1.5	54	01.024	17.5
ERAE 250-4	1~230	50	B	0.77	3.50	1300	149	65	16	-	1.7	54	01.024	17.5

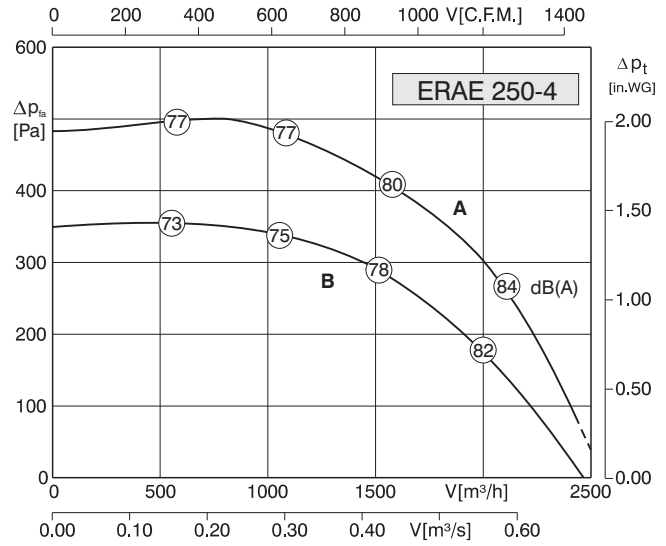