




- compact and space saving design
- 100% speed controllable through auto transformers
- Motor protection through thermal contacts as standard



Type	U [Volt]	f [Hz]	Curve	P _i [kW]	I _N [A]	n [min ⁻¹]	t _R [°F]	t _R [°C]	C [μF]	ΔI [%]	I _A /I _N	▲	★	■ [kg]
ERAE 250-6	1~120	60	A	0.35	3.10	720	122	50	24	-	1.1	54	01.024	15
ERAE 250-6	1~230	60	A	0.35	1.55	720	122	50	6	-	1.1	54	01.024	15
ERAE 250-6	1~230	50	B	0.30	1.30	760	140	60	6	-	1.4	54	01.024	15

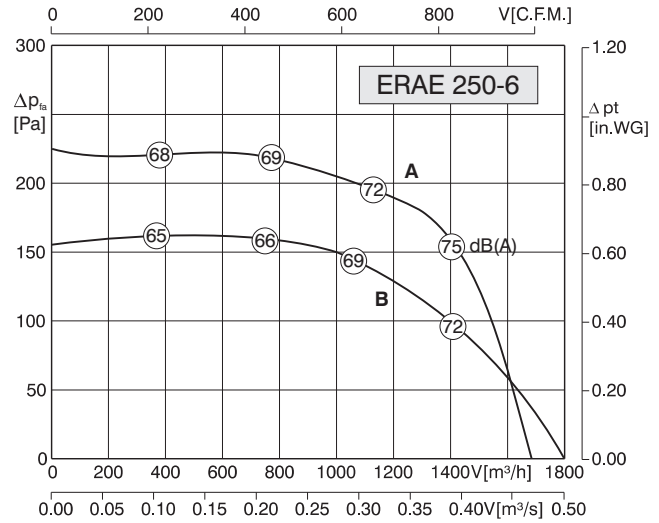