




- compact and space saving design
- 100% speed controllable through auto transformers
- Motor protection through thermal contacts as standard



Type	U [Volt]	f [Hz]	Curve	P _i [kW]	I _N [A]	n [min ⁻¹]	t _R [°F]	t _R [°C]	C [μF]	ΔI [%]	I _A /I _N	▲	★	■ [kg]
ERAE 280-6	1~120	60	A	0.67	3.00	1030	122	50	10	7	1.9	54	01.024	20
ERAE 280-6	1~230	60	A	0.67	6.00	1030	122	50	40	7	1.9	54	01.024	20
ERAE 280-6	1~230	50	B	0.60	2.90	880	122	50	10	14	2.2	54	01.024	20

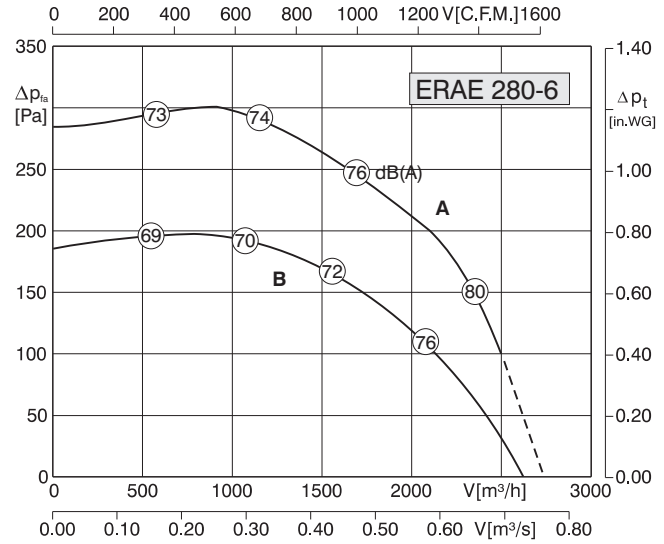