




- compact and space saving design
- 100% speed controllable through auto transformers
- Motor protection through thermal contacts as standard



Type	U [Volt]	f [Hz]	Curve	P <sub>i</sub> [kW]	I <sub>N</sub> [A]	n [min <sup>-1</sup> ]	t <sub>R</sub> [°F]	t <sub>R</sub> [°C]	C [μF]	ΔI [%]	I <sub>A</sub> /I <sub>N</sub>	▲	★	■ [kg]
ERAE 315-6	1~120	60	A	1.15	5.60	835	140	60	64	-	1.4	54	01.025	32
ERAE 315-6	1~230	60	A	1.15	11.2	835	140	60	16	-	1.4	54	01.025	32
ERAE 315-6	1~230	50	B	0.96	5.30	804	158	70	16	-	1.6	54	01.025	32

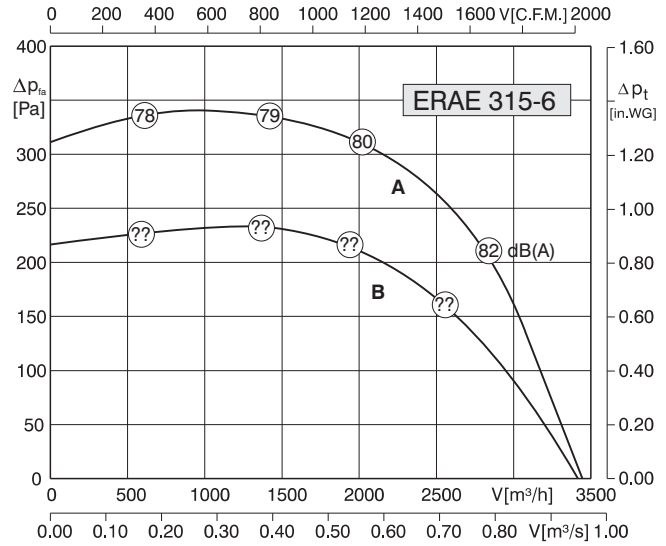